

Designed and manufactured with a wear tube of ½" Towniprene™ urethane, these heavy duty connectors withstand abrasive and corrosive slurries in suction or discharge service, wherever traditional rigid joints are used.

- Steel spring wire and fabric reinforcement
- Integrated steel nipples
- Not affected by thermal excursions
- Solid arch dampens pump vibration
- Available up to 150PSI
- Available in concentric, eccentric & off-set designs
- Can replace rigid pipe in many applications
- Available with reducing dimensions
- 2" to 84" ID
- Face to face up to 24"
- Continuous wear tube terminates on flange face
- · Easily seals misaligned connections
- Ozone resistant cover assures durability
- Excellent for fine-feed



RUBBER PRODUCTS

SERIES 9000 CONNECTOR



Great for sliding abrasion and corrosive feed found in chemical, mineral beneficiation and coal fired power plant use

Replaces rigid connectors to relieve torsional or rotational damage to fixed equipment

Match misalignment in older facilities

Reduce in-plant noise

Call or e-mail us and an experienced Townley Technical Sales Representative will work with you to specify the right connector and options for your application



1 (800) 342-9920

www.townley.net

info@townley.net




RUBBER PRODUCTS

SERIES 9000 CONNECTOR

Townley connectors can be constructed in a variety of configurations to suit your application. This is especially helpful when replacing rigid pipe or in older circuits where settling has occurred. Available with single or multiple arch design depending upon movement specifications.



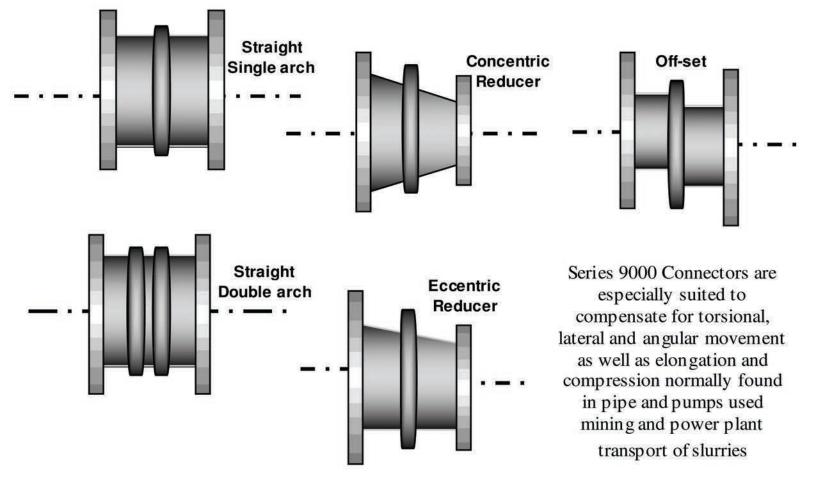

Sales & Manufacturing Centers

Home Office	Arizona	Illinois	Texas	West Virginia
Candler, FL	Eloy, AZ	Eldorado, IL	New Summerfield, TX	Beckley, WV
Phone (800) 342-9920	Phone (520) 466-9223	Phone (618) 273-9341	Phone (903) 726-3503	Phone (304) 252-7084
Fax (352) 687-1862	Fax (520) 466-7235	Fax (618) 273-3418	Fax (903) 726-3737	Fax (304) 253-4542